




S500/S500A

Neutral Safety / Backup light Switch for 1964-67 Chevelle 1965-67 Nova 1964-67 Impala

This replacement neutral safety switch installs directly onto the factory tabs of your GM shifter base. It fits a range of GM automatic transmissions, including Powerglide, 3-speed, 4-speed overdrive, 6-speed models, and 8-speed models.

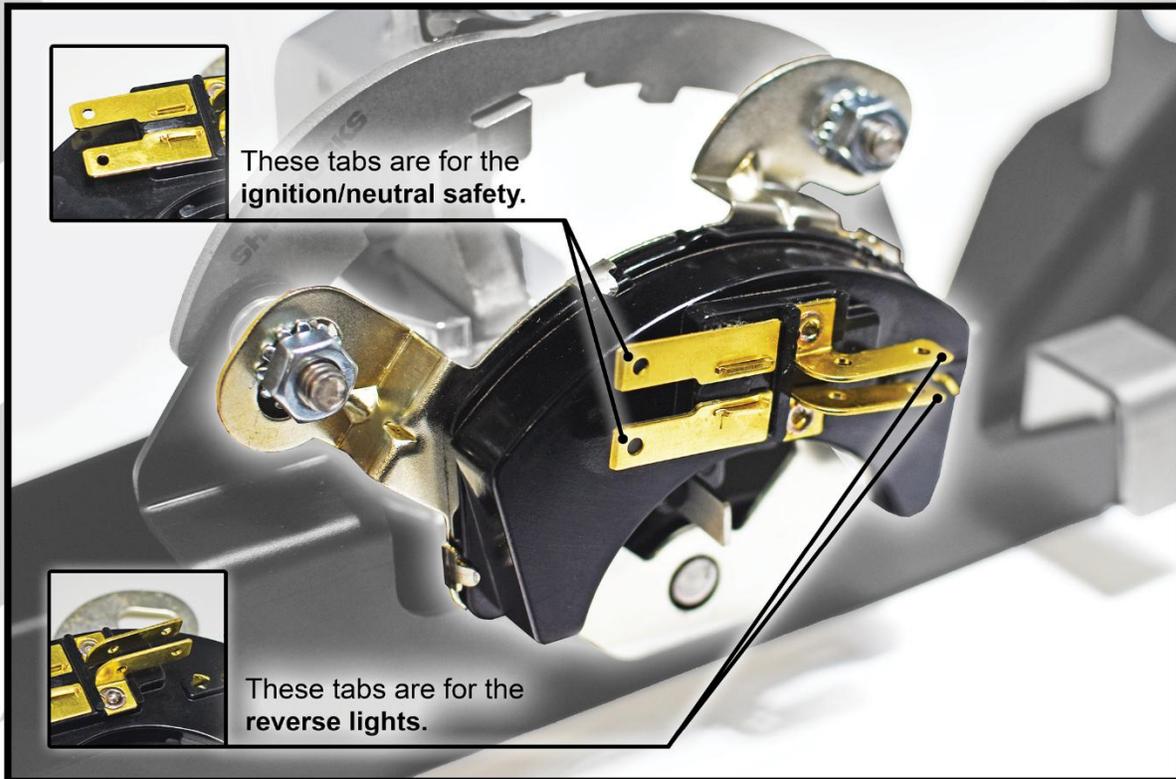

Note: This switch operates by opening or closing the electrical path. There is no “in” or “out” side. Both terminals in each pair function the same. You can wire it in either direction and it will operate correctly.


1964 Original switch had a small wire harness attached, but these switches can be used.



S500 / S500A Terminals




These terminals are for the ignition/ neutral safety wires.

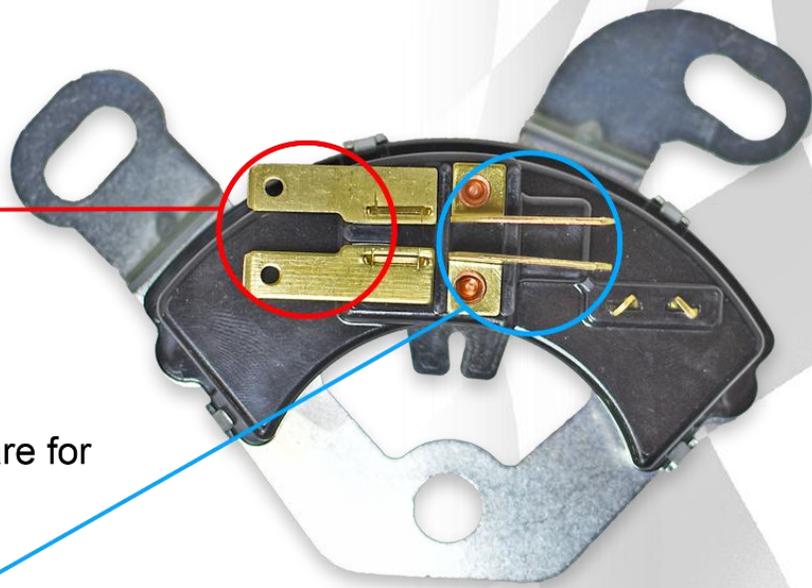

These terminals are for the reverse lights.

This switch is a simple circuit interrupt. There is no specific in or out for each pair of terminals. The terminals are normal male spade/blade terminals, any female spade terminal connector will work and is recommended.

S500 / S500A information continued

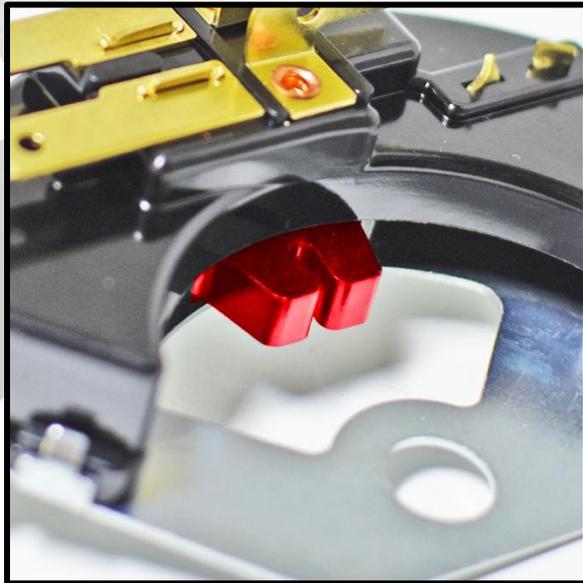

Ensure that the tab on the shifter is positioned in the slot on the switch tab. This is what actuates the switch. If it is not positioned correctly the shifter the switch will not actuate.

The switch's mounting tabs are slotted to allow for adjustment. Adjusting your switch is important to allow for the car to be started in park and neutral and for the reverse lights to come on when the car is in reverse. When buying one of our shifter packages, our switches are already adjusted on the shifters.



If you are having difficulties installing or wiring your switch, or have any other questions regarding products, please reach out to us. We are here to help.

Phone: **585-924-2700**

Email: **support@shiftworks.com**

Social media:

Instagram: **@shiftworksshifters**

Facebook: **Shiftworks, inc.**

Thank you for choosing Shiftworks!



www.shiftworks.com

© 1991-2024 SHIFTWORKS®