

INSTRUCTIONS


© 2023, Speedway Motors, Inc.



916-49060 - Deluxe Coil Over Suspension Kit - Plain

KIT CONTENTS FOR 916-49060			
Qty	P/N	Description	Unit
1	916-45110	Plain radius rods, 32"	PR
1	916-35051	Radius rod front mounts	PR
2	916-45006	Radius rod brackets	EA
2	175-6046-RH	Std. heim 5/8" RH male	EA
4	910-02006	Clevis 5/8" RH - plain steel	EA
1	175-6046-RH	5/8" RH steel jam nuts, 6/pk	EA
1	916-49022	Panhard bar kit - rear	EA
2	255-2254	Street rod shock	EA
2	25510-140	10" coil over spring, 140 lbs.	EA
2	255-1951	Coil over kit, 1.63 body	EA
1	916-49021-1	Nut/bolt kit deluxe coil suspensions	EA
1	916-49060-2	Shock mounting bolts and nuts	EA
1	910-07230-1	Chassis tab 1/2" hole, 8/pk	EA

Please read instructions completely before starting your installation.

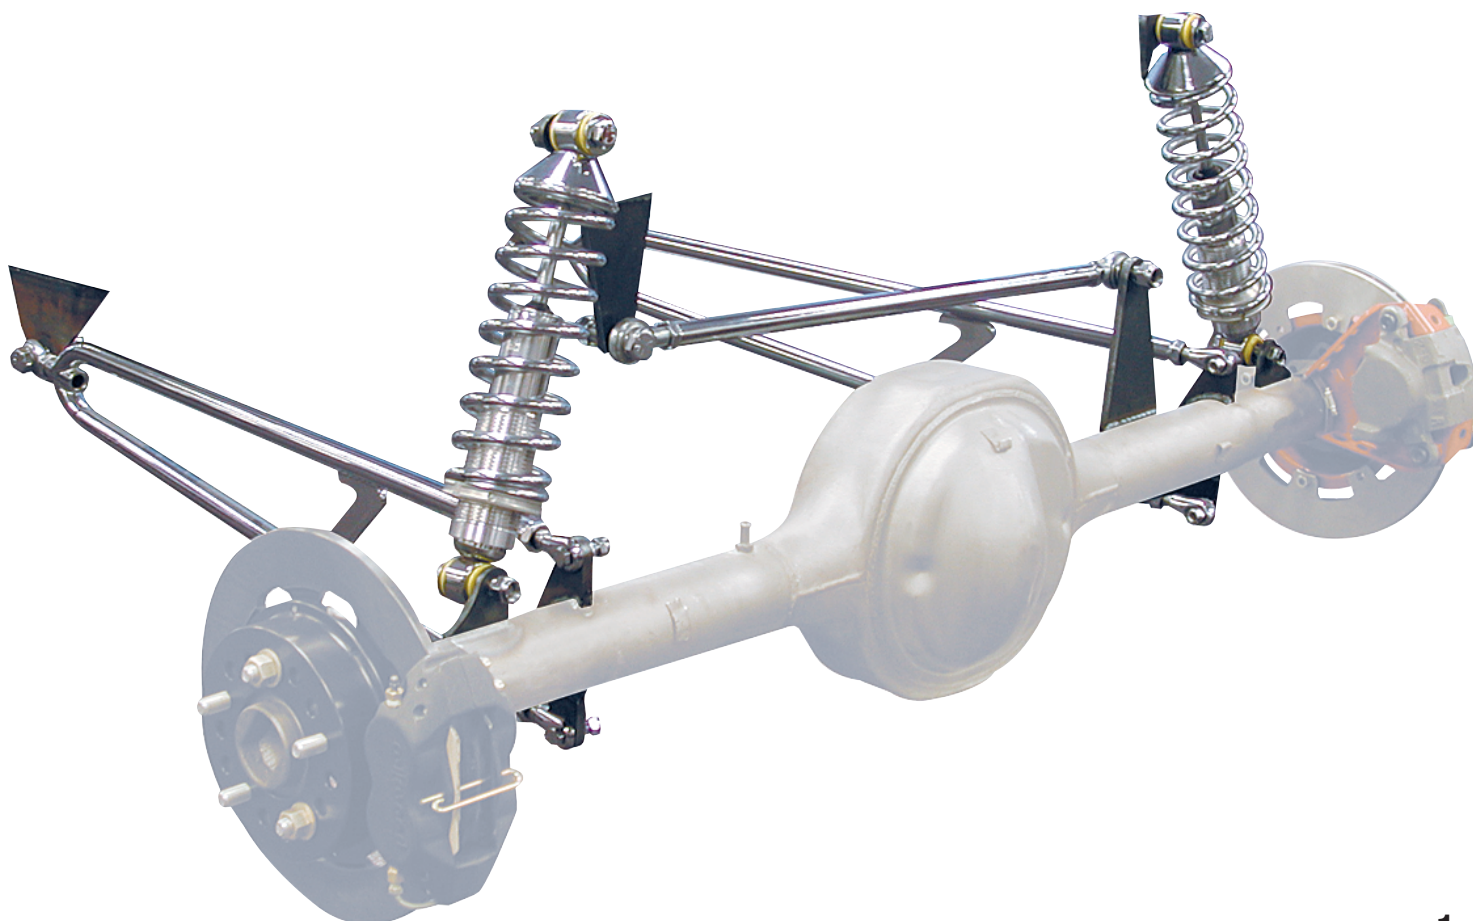

INSTRUCTIONS

© 2023, Speedway Motors, Inc.



Radius Rod Installation:

1. Position frame securely on jack stands, simulating the ride height and rake of the frame.
2. Determine the rear axle centerline either by the location of the original rear axle or by the wheel opening of the body. Mark this location on the frame rails for reference.
3. Place the rear axle under the frame and center it using the reference marks on the frame. The rear axle should be mocked up at ride height. Choose a common hole in the frame or make a mark on each side as a reference to measure from, also measure from the frame to the axle flange or other common point to center axle side to side. Also set the pinion angle as required.
4. Assemble the radius rods. **NOTE:** Anti-seize must be used on the threads of the rod ends and clevis. Failure to use anti-seize will cause the threads to gall and seize up. There is no warranty on galled threads. Thread the rod ends and jamb nuts in approximately 3/4 of the length of the threads; counting the number of turns assures the bars will be the same length. Assemble the radius rod brackets onto the radius rods with the clevis supplied.
5. Clamp or hold the rear radius rod assembly in place. The front bracket will normally need fitting to the frame. Each car is a little different and needs to be dealt with on a one on one basis. Mark the front bracket, trim as required and tack weld in place. Fit the rear brackets to the axle and tack weld in place. The rear brackets should be spaced equally from the end of the axles. Make sure you double check that the rear axle location and the pinion angle has not changed. Disassemble and finish welding the brackets all around.

Panhard Bar Installation:

The chassis and rear end should be mocked up at final ride height before installing the panhard bar. Install the jamb nuts onto the left and right hand heim ends and thread them into the panhard bar about 1". The panhard bar comes with two brackets. The shorter 2" bracket will typically mount to the bottom or the inside of the frame rail and can mount on either rail. The longer bracket typically mounts to the top of the rear end housing. The panhard bar should be mounted as level as possible at ride height or slightly higher at the frame end. The brackets can be trimmed to fit. Make sure the panhard bar has clearance at full suspension travel. Once in position tack weld brackets in place, disassemble and weld all around.

Coil Over Shock Assembly:

Install the snap ring into the groove on the shock. Slide the threaded aluminum sleeve over the shock body making sure the end of the sleeve captures the OD of the snap ring. Thread the spring seat adjuster nut onto the threaded aluminum sleeve. The tapered side goes toward the spring. Install the spring over the shock shaft and onto the spring seat. Slide the spring cap over the shock shaft and onto the top of the spring. Turn the spring seat adjuster nut clockwise until seated against the bottom of the spring. Install the spring cap retainer pin into the spring cap. Install the wire ties through the holes in the spring cap and around the spring.

INSTRUCTIONS

© 2023, Speedway Motors, Inc.



Coil Over Shock Installation:

The shocks that come with this kit are 14-1/2" fully extended and 9-1/2" compressed. Mount your brackets with a center to center distance at 12-7/8"; this is the installed length of the shocks. The upper shock brackets typically mount to the outside or the bottom of the frame rail depending on ride height or shock location. The lower shock mounts weld to the top of the axle housing. The shocks should be mounted at about a 20 degree angle with the shocks angling inward at the top. Mock up the shocks and brackets then tack weld in place. Double check all your dimensions and check clearances with the panhard bar. Tack weld the radius rod support to the radius rods. Disassemble and weld the shock brackets and radius rod supports in place.

Coil Over Shock Adjustment:

After all the weight is on car the coil over shocks need to be adjusted. Failure to do this could result in damage to your shocks. Measure the center to center mounting distance on the shocks; it should measure 12-7/8" with all the weight on the car. Turn the adjusting ring clockwise to increase this dimension or counter clockwise to decrease it. A spanner wrench will be needed for this adjustment. All adjustments should be done with the weight off the springs. After the springs have settled (500 miles or so) it's a good idea to double check this dimension again.

IMPORTANT

DISCLAIMER In an effort to offer our customers low prices, quick service and great value, Speedway Motors reserves the right to change suppliers, specifications, colors, prices, materials without notice. Prices and policies that were current and in effect at the time of printing are also subject to change without notice. Quantities are limited on some items. Any unauthorized use of this catalog including words, photos or drawings is prohibited. Speedway is not responsible for any typographical errors, printing errors or misinterpretations

WARRANTY DISCLAIMER Purchasers understand and recognize that racing parts, specialized street rod equipment, and all other parts and services sold by Speedway Motors, Inc. are exposed to many and varied conditions due to the manner in which they are installed and used. Except for certain limited warranties, if any, set forth in Speedway Motors, Inc.'s current catalog with respect to the products and/or parts thereof identified on your invoice, each product, and each part thereof, is sold "as is", and "with all faults" and Speedway Motors, Inc. makes no warranties either expressed or implied, written or oral, with regard such products and services including, without limitation, any warranty of merchantability or fitness for a particular purpose. Without limiting the foregoing, there is no warranty expressed or implied as to whether the goods sold hereby will protect purchasers or ultimate end-users of such products and parts from injury or death. In no event shall Speedway Motors, Inc. be liable for any special, incidental or consequential damages, or any other damages whatsoever arising out of or connected with the use or misuse of the products and each part thereof. Purchasers acknowledge and agree that no person, entity or agent of Speedway Motors, Inc. has any authority to make any statement contrary to this disclaimer and that any warranty statements or representations allegedly made on behalf of Speedway Motors, Inc. by any such person, entity or agent are void. Purchasers are relying solely on their own skill and judgment to select, purchase and use suitable products and assume all responsibility and risk with regard thereto. Some local laws prohibit the use of utility jugs, funnels and barrel pumps for dispensing fuel. Please check your own state for more information, regulations or further direction in your use of the utility jugs, funnels and barrel pump described in Speedway's catalogs or on Speedway Motors websites. Some parts in this catalog are not legal for sale or use in California. Items sold in this catalog are for racing vehicles which may never be used on a highway. The use of manufacturer's names and symbols are for reference purposes only.

DAMAGE CLAIMS Please inspect all packages upon delivery and in the presence of the delivery driver when possible. The driver must note any visible damage and provide procedures for handling damage claims. To allow for a claims process, please retain original box, packing material and damaged merchandise. Contact Speedway Motors for instructions regarding damage claim within 5 days of receipt. Speedway Motors assumes no liability after this period.

SHORTAGES Please check the contents of your delivery to ensure that all parts ordered are received. Refer to your invoice to cross check all items received and inspect all packing materials for contents of small items. Retain original shipping box and packing materials. Orders may be split into multiple boxes which can be delivered on different days. Contact Speedway Motors for instructions regarding shortage claim within 5 days of receipt. Speedway Motors assumes no liability after this 5 day period.

REFUSALS All refused packages will be billed the freight to and from the destination and refused COD orders will be billed a 15% restocking charge plus freight to and from destination.

WARRANTY CLAIMS If the item is used or installed and a warranty claim request is submitted, warranty work is done by the manufacturer and may take up to 30 days for processing. Speedway Motors will be required to follow the manufacturer's warranty instructions to allow for a credit refund or exchange when specified.

RETURNS We want you to be satisfied with your purchase. If you are not satisfied, you may return your new, unused item within 60 days for refund or exchange.

All exchanged or returned merchandise must be in original factory condition with no modifications or alterations. Returned merchandise must include original packaging materials, warranty cards, manuals, instructions, etc. If the returned item requires repackaging, your refund / exchange will be subject to a repackaging charge. Return/Exchange transactions less than \$99 are excluded from the free shipping offer.

HOW TO RETURN AN ITEM Please re-pack the item in a sturdy box, include a copy of your invoice and completed return form. Returns must be shipped prepaid. CODs are not accepted. Shipping costs for exchanged merchandise will be charged to your credit card.

Items that are returned after 60 days are subject to a 15% restocking charges. Fiberglass items returned will be subject to a 15% restocking charge. We are unable to accept returns on electrical parts, video tapes, DVD's, books, special order or closeout merchandise.

BRAKE INSTALLATION ALERT The selection and installation of brake components should only be done by personnel experienced in the proper installation and operation of braking systems. The installer must use his/her own discretion to determine the suitability of all brake components and brake kits for every particular application. Speedway Motors, Inc. makes no warranties either expressed or implied including any warranty of merchantability or fitness for a particular purpose, other than those contained in its current catalog or website with respect to the goods identified on the face of the invoice. There is no warranty expressed or implied as to whether the goods sold hereby will protect the purchaser or ultimate user of such goods from injury or death.

EXHAUST INSTALLATION ALERT Exhaust systems and other component surface finishes are not permanent. Coatings, paint and other factory supplied cosmetic treatments are only intended to protect from surface corrosion in an unused state. No returns are allowed after the parts have been installed. Header flanges must be clean and clear of paint and surface contaminants prior to mating to exhaust gaskets. Exhaust fasteners must be re-torqued after the initial heat cycle and regularly thereafter to ensure a proper gasket seal is maintained. Should you decide to install this exhaust product at your home, be warned that pleasure car or light duty truck/van "bumper" jacks are intended for emergency use only. The use of frame contact jack stands in conjunction with a floor jack as a main support is highly recommended to minimize accidental dropping of a vehicle while the installation proceeds. We recommend the use of a shop hoist if possible. Please use caution! Speedway Motors, Inc. makes no warranties either expressed or implied including any warranty of merchantability or fitness for a particular purpose, other than those contain in its current catalog or website with respect to the goods identified on the face of the invoice. There is no warranty expressed or implied as to whether the goods sold hereby will protect the purchaser or ultimate user of such goods from injury or death.

CHECK LOCAL LAW Some parts are not legal for sale or use in California on any pollution controlled motor vehicles. These items are legal in California for racing vehicles only which may never be used upon a highway. Check local law.

Find the above info on our website:

SpeedwayMotors.com/Info/FAQ

© 2023, Speedway Motors, Inc.

Speedway Motors, Inc.

P.O. Box 81906 • Lincoln, NE 68501

800.979.0122 • SpeedwayMotors.com

