

MaxLINE

GENERAL SYSTEM

INSTALLATION INSTRUCTIONS

PLANNING/LAYOUT

Before beginning the installation, create a plan as to the location of the air compressor and where you are going to mount the compressed air outlets. On the plan locate outlets, tees, and elbows if needed.

AIR COMPRESSOR

Use a flexible jumper hose from the air compressor to the filter regulator unit to reduce vibration to the Maxline tubing.

FILTER REGULATOR

Maxline tubing is resistant to most common petroleum based compressor oils. Some new synthetic oils will reduce the life of the tubing. A high quality filter regulator is recommended to catch oils entering the air system.

PRESSURE RATINGS

The Maxline tubing is rated for 175 psi at 70 deg F and less, 140 psi at a maximum temperature of 140 deg F.

BENDING THE TUBING

The Maxline tubing can be bent to hold any shape. Care should be taken not to kink the tubing, but rather bend the tubing in a sweeping radius around corners and obstacles. Elbow fittings are available for sharp corners.

ASSEMBLY OF THREADED COMPONENTS

Apply pipe sealant/paste to all threaded connections, except fitting nuts during assembly.

DO NOT USE TEFLON TAPE


TUBING INSTALLATION

Maxline tubing will expand and contract slightly with changes in temperature.

Use wall clips spaced 5 ft for 3/4" tubing,
3 ft for 1/2" tubing.

**Always pressure test system
before closing up walls.**

EXAMPLE LAYOUTS

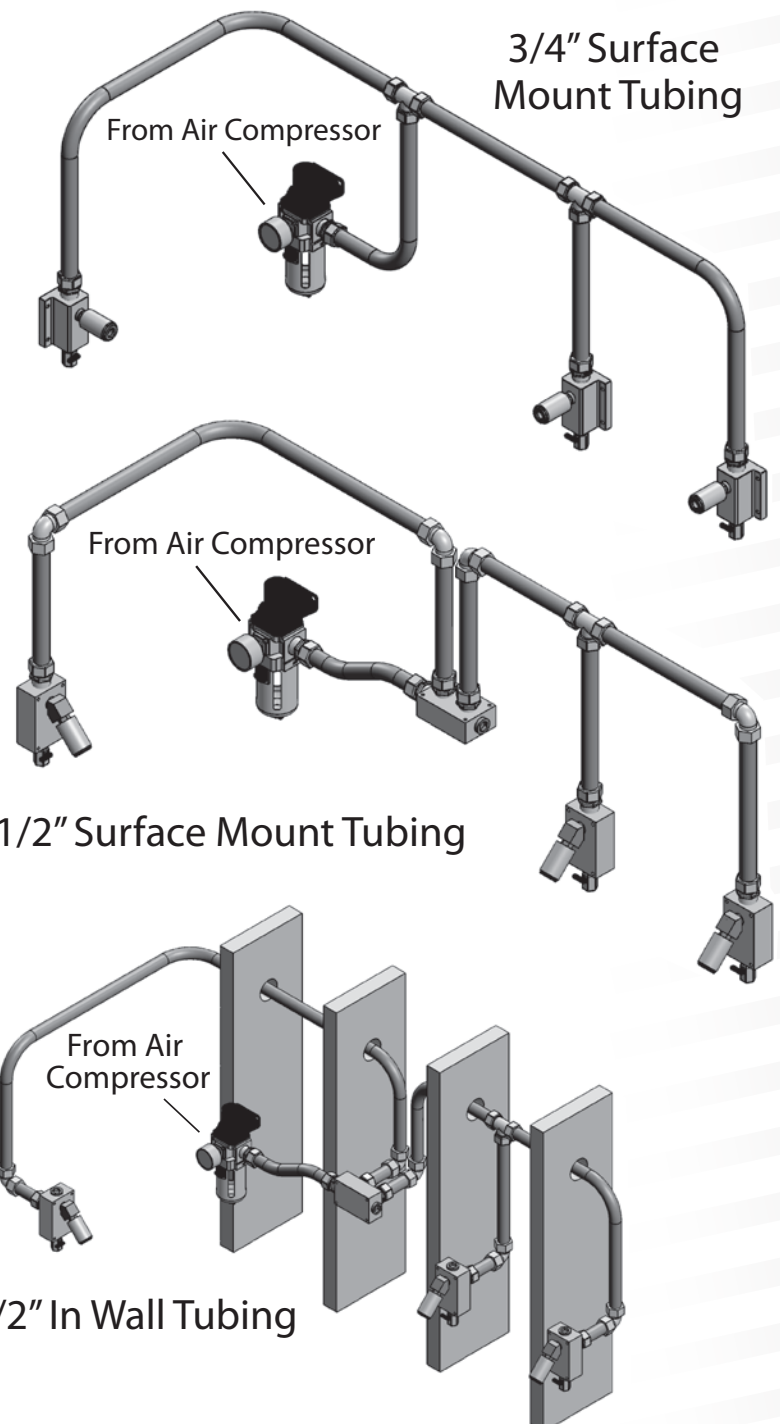

Tools and installation



1) CUT the tubing square with the cutter, **ROTATING** wrist while cutting



2) BEVEL the inside of the tubing by inserting the reaming tool and rotating it at least 3 full turns

- Use peg #25 for 3/4" tubing
- Use peg #16 for 1/2" tubing


Remove nut and split ring from fitting and place on tubing



3) PUSH the fitting onto the tubing and fully against the shoulder of the fitting (soapy water will help this process)



4) TURN the nut finger tight
Put a reference mark on the nut and fitting body



5) TIGHTEN nut with wrench a minimum 3/4 of a turn or until tight

WARNINGS

- Regulate system pressure to a maximum of 175 psi.
 - Pressurize system slowly
 - Turn off air compressor when not in use
- Check local building codes before installation.
- Compressed air is dangerous if not used properly.
- Do not point compressed air source at any part of your body or at any person.
- Always use eye protection when using compressed air.
- CA PROP 65: This product contains chemicals known to the state of California to cause cancer and birth defects or other reproductive harm.

Outlet Assemblies



M3810

Front of block is ported
1/4" Female NPT




M7510, M8101

Front of block is ported
1/2" NPT Female
Coupler Not Included



M8200, M8201

Front of block is ported
1/2" NPT Female
(X 2)

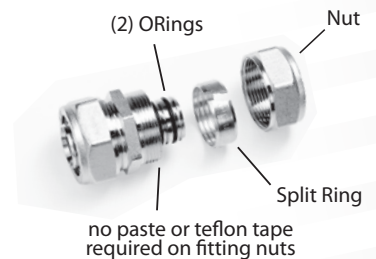

Engineered Specialties, LLC • Arpin, WI • 800-954-3310

For installation tips and warranty information, please visit www.RapidAirproducts.com

IF YOU ARE EXPERIENCING TROUBLE WITH THIS PRODUCT,
OR MISSING PARTS, PLEASE CALL 800-954-3310 FOR ASSISTANCE
DO NOT RETURN TO STORE

MaxLINE

M7500 3/4" MASTER KIT

INSTALLATION INSTRUCTIONS

PLANNING/LAYOUT

Before beginning the installation, create a plan as to the location of the air compressor and where you are going to mount the compressed air outlets. On the plan locate outlets, tees, and elbows if needed.

AIR COMPRESSOR

Use a flexible jumper hose from the air compressor to the filter regulator unit to reduce vibration to the Maxline tubing.

FILTER REGULATOR

Maxline tubing is resistant to most common petroleum based compressor oils. Some new synthetic oils will reduce the life of the tubing. A high quality filter regulator is recommended to catch oils entering the air system.

PRESSURE RATINGS

The Maxline tubing is rated for 175 psi at 70 deg F and less, 140 psi at a maximum temperature of 140 deg F.

BENDING THE TUBING

The Maxline tubing can be bent to hold any shape. Care should be taken not to kink the tubing, but rather bend the tubing in a sweeping radius around corners and obstacles. Elbow fittings are available for sharp corners.


ASSEMBLY OF THREADED COMPONENTS

Apply pipe sealant/paste to all threaded connections, except fitting nuts during assembly.

DO NOT USE TEFLON TAPE

TUBING INSTALLATION

Maxline tubing will expand and contract slightly with changes in temperature. Use supplied wall clips spaced every 5 ft.

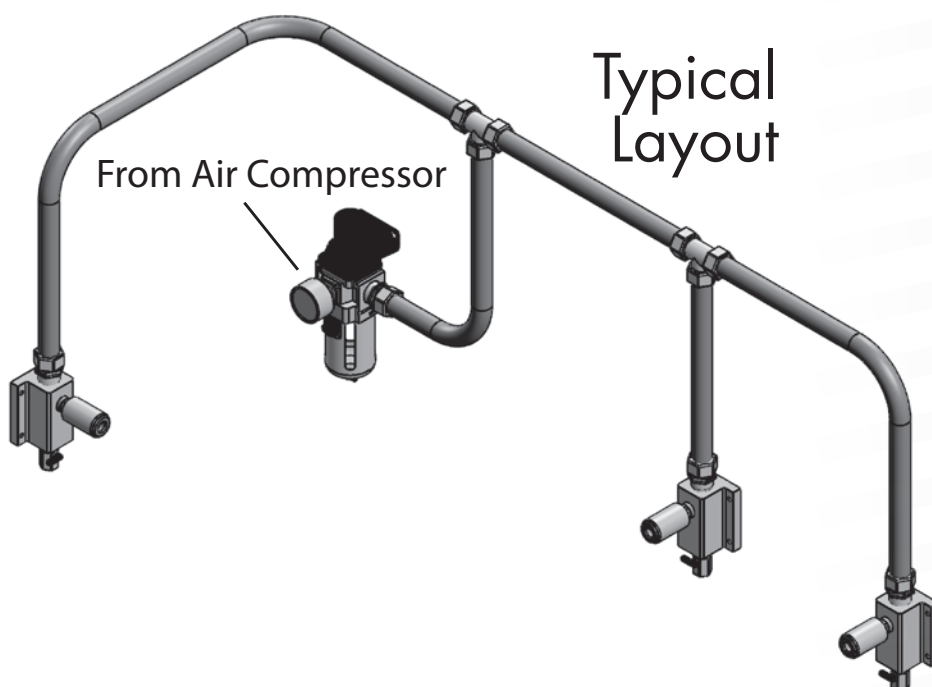

Tools and installation



1) CUT the tubing square with the cutter, **ROTATING** wrist while cutting




2) BEVEL the inside of the tubing by inserting the reaming tool and rotating it at least 3 full turns
- Use peg #25 for 3/4" tubing
Remove nut and split ring from fitting and place on tubing



3) PUSH the fitting onto the tubing and fully against the shoulder of the fitting (soapy water will help this process)



4) TURN the nut finger tight
Put a reference mark on the nut and fitting body



5) TIGHTEN nut with wrench a minimum 3/4 of a turn or until tight



M7500 MASTER KIT PARTS LIST

- 100ft 3/4" Maxline Tubing
- (3) M81010 Aluminum Blocks
- (3) M8005 3/4" Tubing x 1/2" NPT fittings
- (3) 50136 1/2" npt Plugs
- (3) 50120 3/8" npt Drain Valves
- (1) M8003 3/4" Tubing x 3/4" NPT Fitting
- (2) M8011 Tee Fittings
- (20) Tubing Clips
- Cutter and Bevel Tool



Front of block is ported
1/2" NPT Female

Coupler Not Included



WARNINGS

- Regulate system pressure to a maximum of 175 psi.
 - Pressurize system slowly
 - Turn off air compressor when not in use
- Check local building codes before installation.
- Compressed air is dangerous if not used properly.
- Do not point compressed air source at any part of your body or at any person.
 - Always use eye protection when using compressed air.
- CA PROP 65: This product contains chemicals known to the state of California to cause cancer and birth defects or other reproductive harm.

Engineered Specialties, LLC • Arpin, WI • 800-954-3310

For installation tips and warranty information, please visit www.RapidAirproducts.com

IF YOU ARE EXPERIENCING TROUBLE WITH THIS PRODUCT,
OR MISSING PARTS, PLEASE CALL 800-954-3310 FOR ASSISTANCE
DO NOT RETURN TO STORE

MaxLINE

M3800 1/2" MASTER KIT

INSTALLATION INSTRUCTIONS

PLANNING/LAYOUT

Before beginning the installation, create a plan as to the location of the air compressor and where you are going to mount the compressed air outlets. On the plan locate outlets, tees, and elbows if needed.

AIR COMPRESSOR

Use a flexible jumper hose from the air compressor to the filter regulator unit to reduce vibration to the Maxline tubing.

FILTER REGULATOR

Maxline tubing is resistant to most common petroleum based compressor oils. Some new synthetic oils will reduce the life of the tubing. A high quality filter regulator is recommended to catch oils entering the air system.

PRESSURE RATINGS

The Maxline tubing is rated for 175 psi at 70 deg F and less, 140 psi at a maximum temperature of 140 deg F.

BENDING THE TUBING

The Maxline tubing can be bent to hold any shape. Care should be taken not to kink the tubing, but rather bend the tubing in a sweeping radius around corners and obstacles. Elbow fittings are available for sharp corners.

ASSEMBLY OF THREADED COMPONENTS


Apply pipe sealant/paste to all threaded connections, except fitting nuts during assembly.

DO NOT USE TEFLON TAPE

TUBING INSTALLATION


Maxline tubing will expand and contract slightly with changes in temperature. Space tubing clips every 3 ft for surface mount.

Always pressure test system before closing up walls.

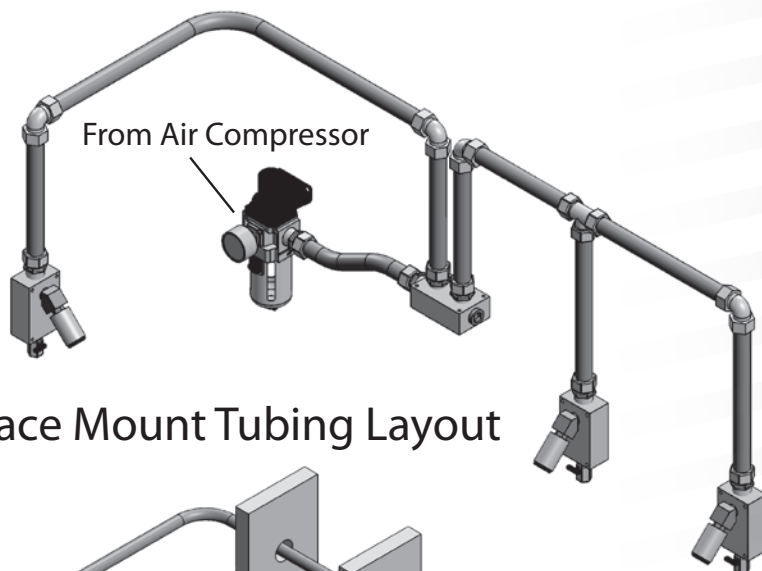

Surface Mount Tubing Layout

OR

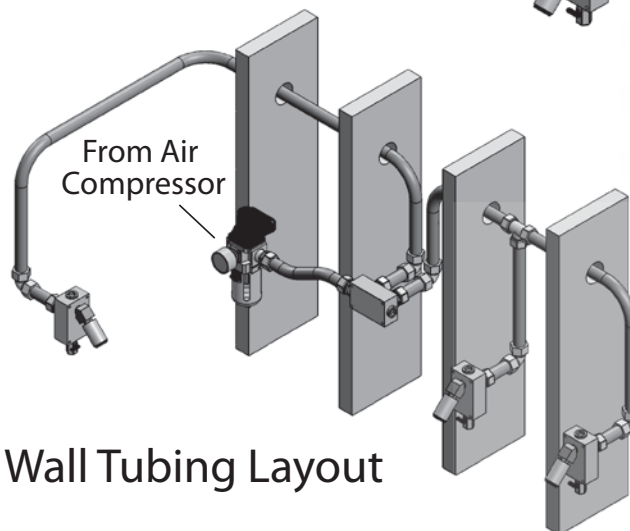

In Wall Tubing Layout

Tools and installation



1) CUT the tubing square with the cutter, **ROTATING** wrist while cutting



2) BEVEL the inside of the tubing by inserting the reaming tool and rotating it at least 3 full turns

- Use peg #16 for 1/2" tubing

Remove nut and split ring from fitting and place on tubing



3) PUSH the fitting onto the tubing and fully against the shoulder of the fitting (soapy water will help this process)



4) TURN the nut finger tight Put a reference mark on the nut and fitting body



5) TIGHTEN nut with wrench a minimum 3/4 of a turn or until tight




M3800 MASTER KIT PARTS LIST

- 100ft 1/2" Maxline Tubing
- (1) M38220 Manifold Block
- (3) 90120 Outlet Blocks
- (6) M8001 1/2" Tubing x 3/8" NPT fittings
- (1) M8002 1/2" Tubing x 1/2" NPT Fitting
- (4) 50135 3/8" npt Plugs
- (3) 50120 3/8" npt Drain Valves
- (3) 50130 3/8" 45 Deg Brass St. Elbows
- (1) M8010 Tee Fitting
- (5) M8080 Elbow Fittings
- Cutter and Bevel Tool



Front of block is ported
1/4" Female NPT

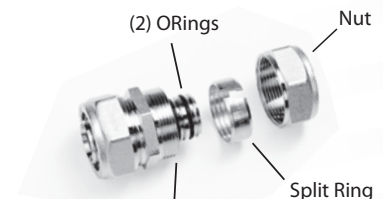

WARNINGS

- Regulate system pressure to a maximum of 175 psi.
 - Pressurize system slowly
 - Turn off air compressor when not in use
- Check local building codes before installation.
- Compressed air is dangerous if not used properly.
- Do not point compressed air source at any part of your body or at any person.
 - Always use eye protection when using compressed air.
- CA PROP 65: This product contains chemicals known to the state of California to cause cancer and birth defects or other reproductive harm.

Engineered Specialties, LLC • Arpin, WI • 800-954-3310

For installation tips and warranty information, please visit www.RapidAirproducts.com