


Chromoly Drag Rear Trailing Arms w/ Rod-Ends
Item # 2527

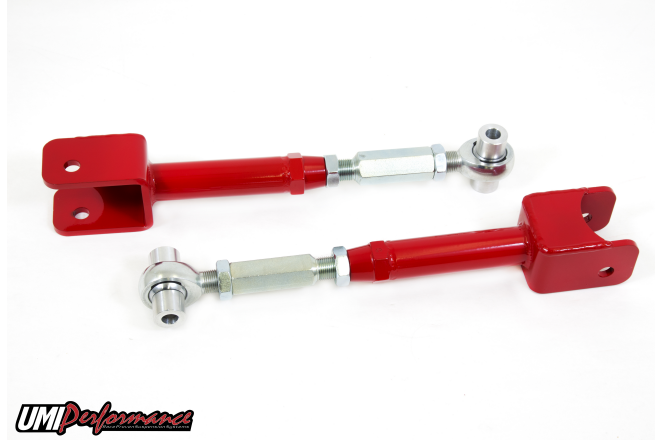

Box Contents:

- (1) Installation Instruction Sheet
- (2) Rear Trailing Arms
- (2) Roto-Joints and Adjuster/Jam Nuts (Mounted)
- (2) Grease Fittings (Mounted)

Applications:

- * 2010 – 2011 Chevrolet Camaro (All Models)
- * 2008 – 2009 Pontiac G8 (All Models)

1. Before installation, verify box contents are correct and read through instructions completely.
2. On a solid, level surface, jack up the rear of the vehicle to a good working height, making sure both wheels are off of the ground, and secure with (2) jack stands under the frame, one on each side. **Do NOT support vehicle by the rear axle.**

NOTE: Remove wheel for easier install, but not necessary to complete install.

3. Use an 18mm wrench to loosen and remove stock rear trailing arm. (See IMAGE #1)

NOTE: Loosen toe arm to remove trailing arm bolt at wheel

4. Locate new UMI arm, place over existing arm using bolts to align center to center distance. Verify correct length or adjust accordingly before installation

5. Install UMI Trailing Arm loosely at both ends, using (2) 18mm bolts removed in step #3.

NOTE: A helper positioning the wheel as the trailing arm is fit into place could speed up the install.

6. At this time, snug both 18mm bolts at both ends, but **DO NOT tighten** yet.

7. Repeat steps #3 - #5 for the opposite side.

8. Load the suspension and tighten bolts to factory specification. **REMINDER:** Tighten both driver and passenger side toe arm bolts that were loosened in step #3 to factory specification.

NOTE: To adjust the trailing arm, loosen right and left handed jam nuts, and turn the hex adjuster accordingly.

Tighten Jam nuts once desired alignment is achieved. **CHECK JAM NUTS FREQUENTLY FOR TIGHTNESS.**

Thank you for putting your trust in a UMI Performance product!



IMAGE #1



IMAGE #2

DISCLAIMER OF WARRANTY

THE PURCHASER ACCEPTS ALL RESPONSIBILITY FOR THE FINAL USE OF THE PRODUCTS PURCHASED AND SHALL HOLD UMI PERFORMANCE INCORPORATED AND ITS REPRESENTATIVES HARMLESS IN ANY LEGAL PROCEEDING ARISING FROM THE USE OF SUCH PRODUCTS.

UMI PERFORMANCE INCORPORATED DOES NOT WARRANT, GUARANTEE, OR MAKE ANY REPRESENTATION REGARDING THE USE, OR THE RESULT OF THE USE OF ANY PERFORMANCE PRODUCT MANUFACTURED OR DISTRIBUTED BY UMI PERFORMANCE INCORPORATED. PURCHASER ASSUMES THE ENTIRE RISK AS THE RESULT AND PERFORMANCE OBTAINED FROM THE INSTALLATION AND USE OF SAID PERFORMANCE PRODUCTS. UMI PERFORMANCE INCORPORATED ASSUMES NO RESPONSIBILITY FOR AND HEREBY DISCLAIMS ALL WARRANTIES, ORAL OR WRITTEN, EXPRESS OR IMPLIED INCLUDING WITHOUT LIMITATION, THE WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE.

ALL PARTS ARE WARRANTED TO BE FREE OF DEFECT AT THE TIME OF PURCHASE. WARRANTY IS ONLY EXTENDED TO REPLACEMENT OF PARTS FROM UMI PERFORMANCE INCORPORATED AND DOES NOT COVER LABOR, TOWING OR ANY OTHER DIRECT OR INDIRECT COST. UMI PERFORMANCE INCORPORATED IS NOT RESPONSIBLE FOR ANY CONSEQUENTIAL DAMAGE, EXPENSE OR INJURY ARISING FROM THE USE, MISUSE OR IMPROPER INSTALLATION OF ANY PRODUCT MANUFACTURED AND/OR SOLD BY UMI PERFORMANCE INCORPORATED.

Item # 2527

Rear Adjustable Trailing Arms w/ Rod-Ends
UMI Performance Inc.
Made in Pennsylvania, USA

Thank you for putting your trust in a UMI Performance product!

Page 2 of 2