



Super Competition Full Length Car Headers
2117HKR (Black), 2117-1HKR (Ceramic), 2117-3HKR (Darkside), & 2117-4HKR (Titanium)
1970-81 Camaro • 1975-79 Chevy II & Nova (265-400)
1978-81 Firebird & Trans Am • 1977-79 Ventura, Phoenix, & (74) GTO (265-400CH)

Thank you for making HOOKER HEADERS your choice in a high-performance exhaust system. Extensive dyno/track testing has enabled HOOKER to offer the most advanced design in headers for your application. Due to the restricted room available in the engine compartment, your headers may be close to some body and chassis components. This condition is normal. The installation, while not complex, will take a certain amount of time. However, the additional horsepower and improved performance will more than justify your efforts. Proper installation and maintenance will ensure long life and maximum performance from your hooker exhaust system.

WARNING! Breaking in an engine with ceramic-coated headers **WILL result in damage to the coating and will VOID all warranties.** Ceramic-coated headers require several heat cycles to fully cure before they will withstand extreme heat. Hooker® recommends using a cast iron exhaust manifold or old headers to break in new engines to avoid coating damage. Please call tech service at 1-270-781-9741 or 1-866-464-6553 for additional information regarding ceramic-coated exhaust products.

BEFORE STARTING

Your vehicle must be raised a minimum of 36 inches. A floor hoist is ideal. If no hoist is available we strongly urge the use of axle stands as a safety measure. **CAUTION!** Your car should not be supported on a bumper jack prior to installing headers, take the time to make a careful and complete inspection of both engine and transmission mounts. Replace them if they look worn or damaged, otherwise this may affect the header fitting into your vehicle properly.

INSTALLATION PROCEDURE – PLEASE READ CAREFULLY!

LEFT SIDE:

1. Disconnect the battery cable to prevent damage to the electrical system.
2. Unbolt the headpipe from the stock exhaust manifold and push aside.
3. Remove oil filter, clutch linkage, spark plugs, exhaust manifold, and dipstick tube (1976 & 1980 models do not require oil filter removal).
4. Starting from below, work the header up through the chassis into position.
5. Place the gasket into position and start all bolts (most restricted first).

NOTE: Vehicles equipped with power steering require the installation of the furnished spacer (**Figure A**).

6. Tighten all bolts evenly (most restricted first).
7. Reinstall the clutch linkage, oil filter, dipstick tube, and spark plugs.

RIGHT SIDE:

1. Unbolt the headpipe from the stock exhaust manifold and push aside.
2. Remove the starter, spark plugs, and exhaust manifold.
3. Remove the center bolt from motor mount and raise the engine about 2 inches. Place a board between the pan and the jack (1976 & 1980 models do not require that the engine be jacked up).
4. Starting from below, work the header and the starter up through the chassis into position at the same time. About halfway, install the starter.
5. Lower the engine and replace the motor mount bolt.
6. Place the gasket into position and start all bolts (most restricted first).
7. Tighten all the bolts evenly (most restricted first).
8. To connect the collectors to the headpipes, purchase Hooker reducer kit, P/N 11030HKR.

NOTE: A dual exhaust system can be fabricated using the HOOKER comp turbo mufflers (21005HKR or 21006HKR).

9. Connect the battery, start the engine, and check for leaks. Make sure all brake lines, fuel lines, transmission cooler lines, and electrical wires have sufficient clearance. Reroute, as necessary.
10. When finished, give your car a test drive, checking carefully for any new noises. After several days of driving, retighten all bolts.

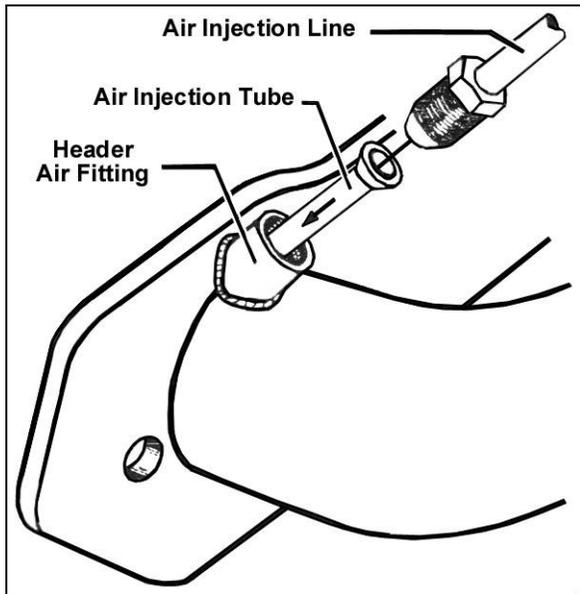


Figure A

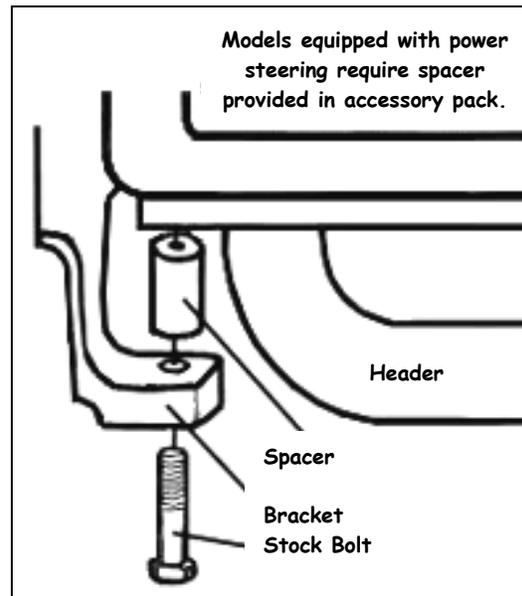


Figure B

LIMITATION OF LIABILITY – DISCLAIMER

The regulation of emissions production, noise levels, and safety standards is undertaken by the federal government, each of the fifty state legislatures, and by many local municipalities, towns, and counties.

HOKKER Industries makes no warranties of merchantability, of fitness for particular purpose, or that its products are approved for general use, or that its products comply with laws, regulations, or ordinances in the states where they may be sold to the ultimate purchaser, the consumer.

Unless expressly stated to the contrary in the catalog, instruction sheet, or price list, the entire risk as to the conformity of any company product in any such state and as to repair should the product prove to be defective or nonconforming, is on the retail purchaser, the buyer, the ultimate consumer, of such product and it is not upon the seller, distributor, or manufacturer.

In this connection, the retail purchaser, the buyer, the ultimate consumer assumes the burden of the entire cost of any and all necessary service, alterations, or repair.

The foregoing statement limits the liability of the manufacturer.

California vehicle code, sections 27156 and 38391, prohibits the advertising, offering for sale, or installation of any device, which modifies a vehicle's emission control system, unless exempted, unless otherwise noted. HOKKER™ Headers that have not received an Executive Order (E.O.) exemption from these code sections are not legal for sale or use in California on vehicles originally equipped with catalytic converters, except for racing vehicles, which may never be driven upon a highway. Check with your local authorities to determine if these headers are legal for use in your particular area.

HOKKER TECHNICAL SUPPORT
Toll-Free Phone: 1-866-464-6553
Phone: 1-270-781-9741
Fax: 1-270-781-9772

For online help, please refer to the Tech Service section of our website: www.holley.com

© 2006 Holley Performance Products, Inc. All rights reserved.

2117HKR
 Revision Date: 9-22-14